
KITCHEN PLAN

SOURCE COORDINATION / 22 OCT 2026

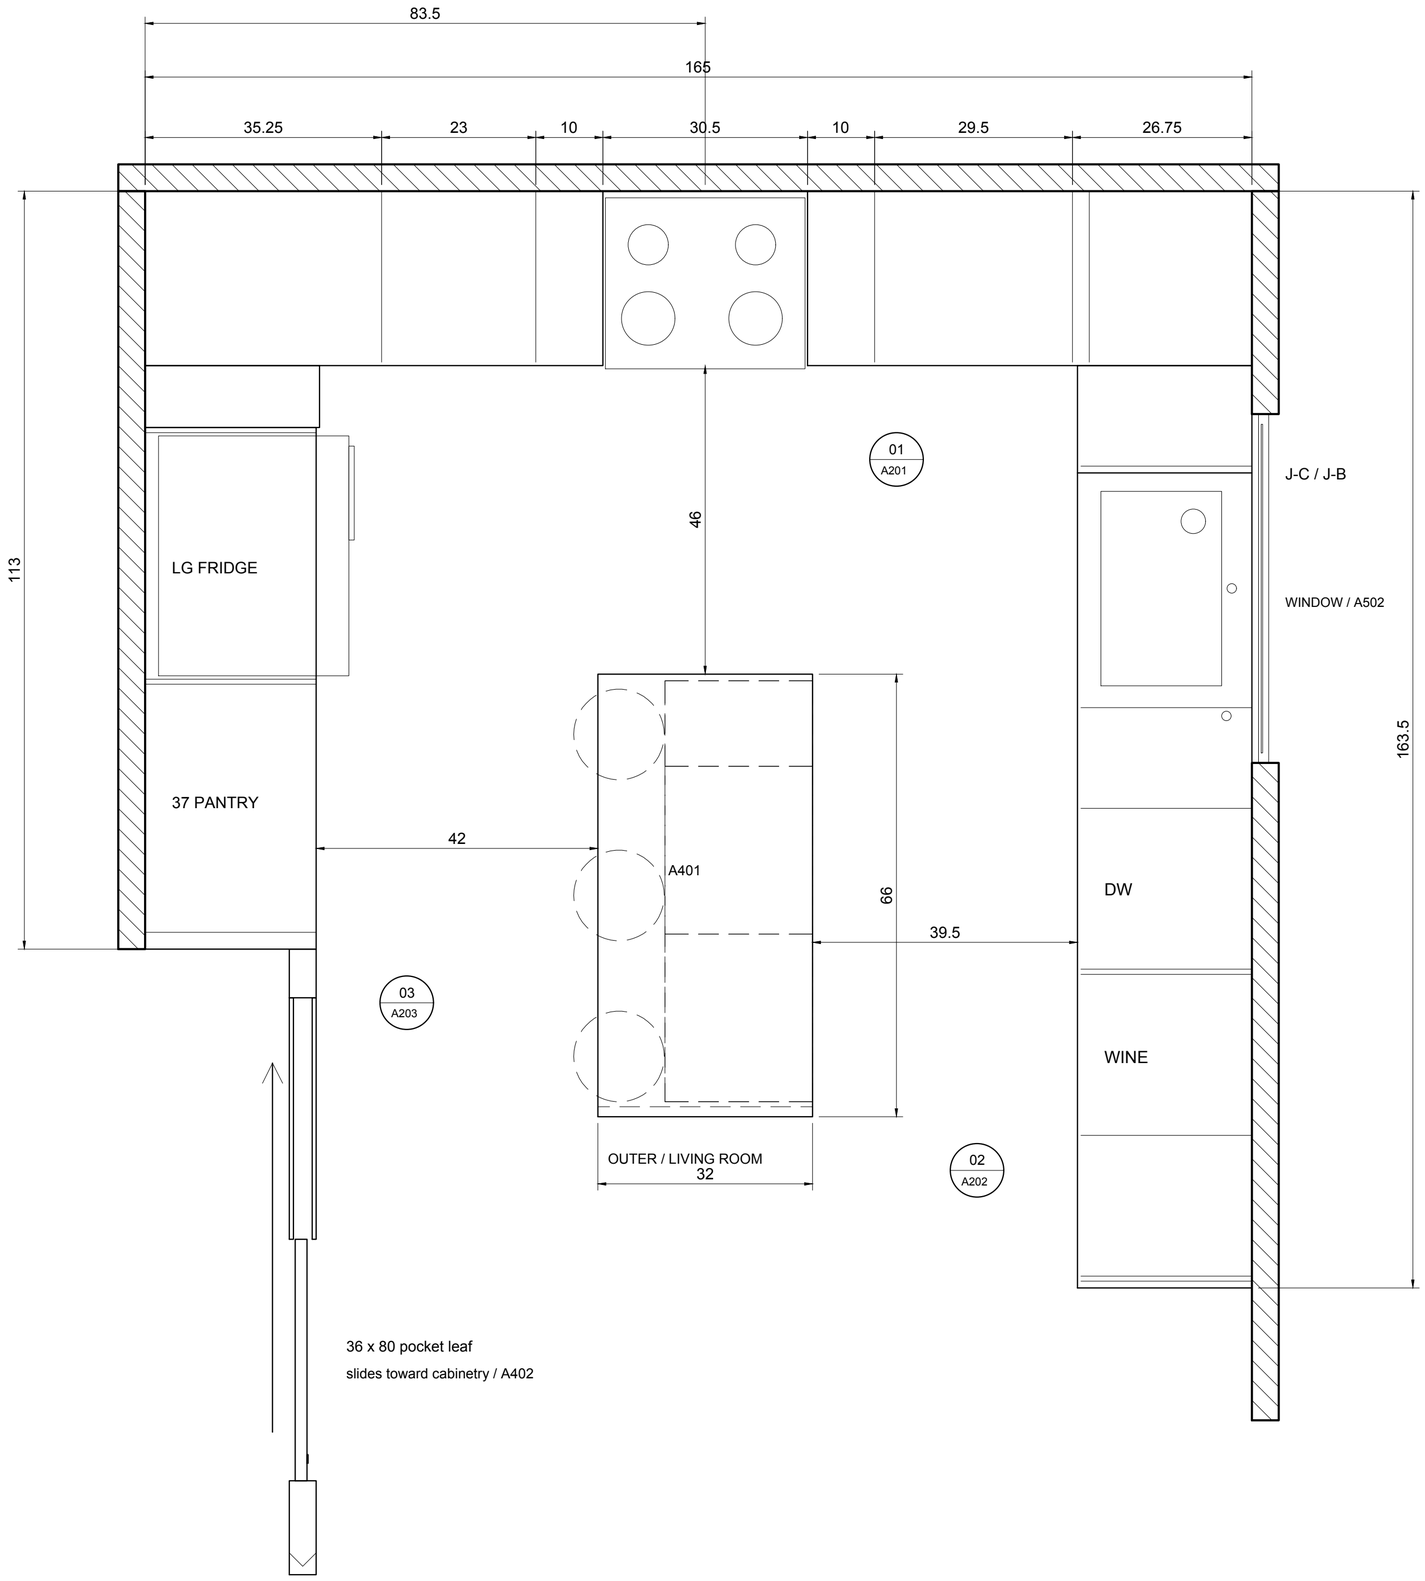

COORDINATION DATUMS

Origin: back-left finished drywall.
X across range wall; plan depth D to living room.
Native WCS Y = -D; Z = height. Ceiling = 108.
Range and island centreline X = 83.5.

COUNTERTOPS
12 mm Statuario porcelain throughout.
36 finished height; 26 perimeter depth.
Island: 66 x 32; body 22 + overhang 10.
One waterfall at outer / living-room end.

DIMENSION CHAIN
165 = 35.25 + 23 + 10 + 30.5
+ 10 + 29.5 + 2.5 + 24.25
113 = 35.25 + .75 + 36.75
+ .75 + 37 + 2.5

FIXED SURFACE GAPS
Left side 42; sink side 39.5; rear 46.
These exclude occupants and open doors.

SOURCE / HOLDS
Cabinet pp. 2-6; Stone R9 S02.
Window CL / sink / tap: 59.25 nominal.
Source 1/4 in. discrepancy: field verify.
Pocket kit and wall construction unselected.
Wall thickness and adjacent extent contextual.
Three stools: compact occasional seating.

KITCHEN RENOVATION

DESIGN COORDINATION STUDY - FIELD VERIFY - NOT FOR CONSTRUCTION

Kitchen plan

22 OCT 2026 | 3/4 in. = 1 ft | 24 x 18 in. | INCHES

A101

RANGE WALL ELEVATION

SOURCE COORDINATION / 22 OCT 2026



MATERIAL / HARDWARE
Saba Beige Bolero laminate.
Hard Rock Maple interiors.
Richelieu nickel pull 6132896195.
96 mm centres / 136 mm overall.

SELECTED HOOD B
Owner coordination: 22 October.
Lowest modeled underside = 66.
30 above finished electric cooktop.
Stone bottom approx. 68-1/4.
Centre stone height approx. 39-3/4.
Final dimensions against actual Sakura.

RANGE PULLOUTS
Left 10 bay: spice rack.
Right 10 bay: utensil holder.
Single full-height fronts; top horizontal pulls.
Internal accessory studies: see A402.

B03 RANGE BACKSPLASH
Lower edge = 31 / 5 below counter.
Upper shoulder to selected hood datum.
32 upper / 30.5 lower stepped piece.
Overall approx. 37-1/4 derived; field verify.
Independent of hood-front stone height.


SOURCE
Owner notes 22 Oct; Cabinet p. 5.
Stone R9 S05 / S08; detail A602.

01 RANGE WALL / SELECTED HOOD B

Full-height pullouts: spice left / utensils right. B03 extends 5 below counter; see A602.

SINK WALL ELEVATION

SOURCE COORDINATION / 22 OCT 2026

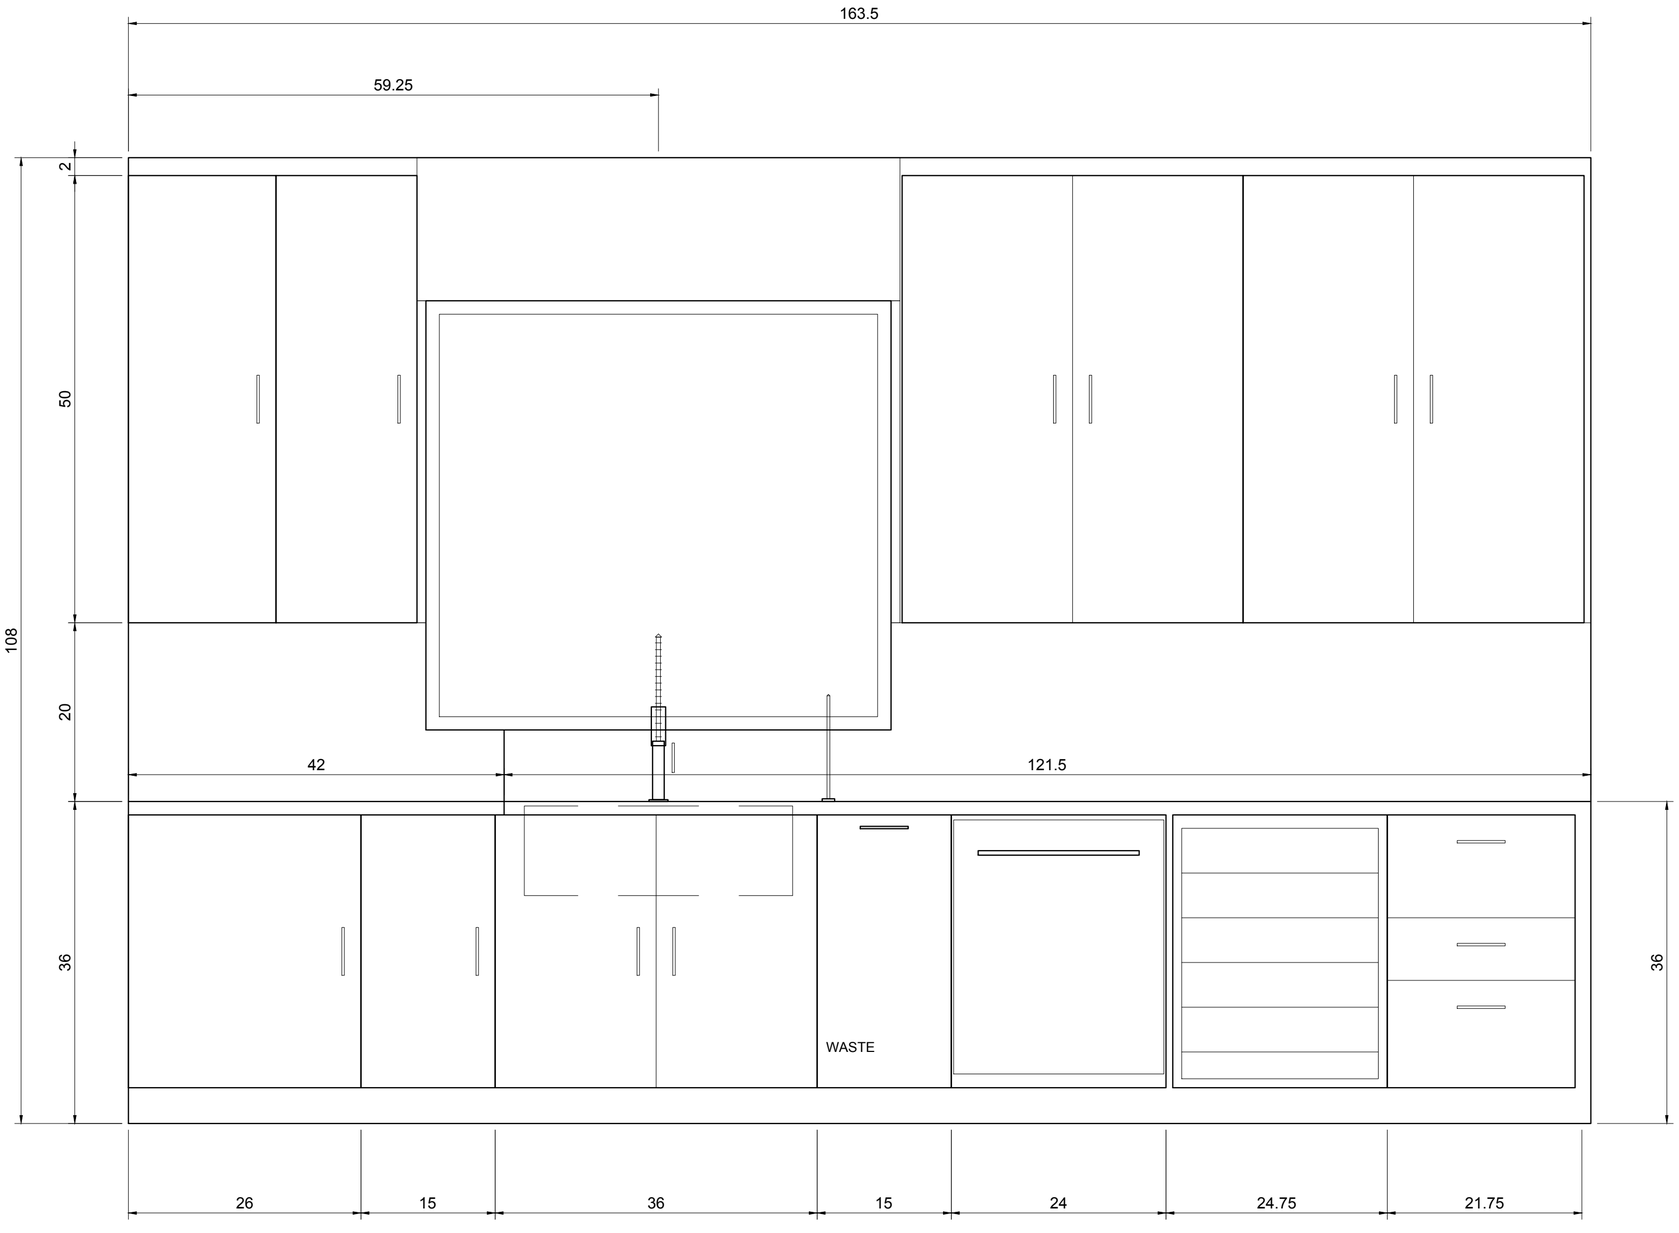

COUNTER / BACKSPLASH
Base run 162.5; finished counter 163.5.
C03 and B06 each 121.5 long.
Counter and backsplash seams at 42.
B06 continuous shaped piece.

WINDOW / SINK HOLD
Window / sink / tap CL = 59.25
from back-wall drywall, nominal.
Cabinet p. 6 flags 1/4 in. discrepancy.
Resolve before sink or tap machining.
Blinds and internal applied trim removed.
W01-W07: seven porcelain pieces.

PROPOSED FIXTURES
Kraus KWU110-30 sink study.
KPF1610 current study: 18.75 high.
8.625 reach / 6.25 outlet above deck.
Separate filter tap to the right.
Final cutout templates and tap offsets
must follow selected products.

OTHER HOLDS
15 in. full-height waste pullout.
Tandem garbage / recycling bins.
Internal divider/support; see A402.
Final bin/hardware selection pending.
Counter seam-to-cutout gap: field check.
123 slab - 121.5 piece = 1.5 gross
before kerf, edge and trim allowances.


SOURCE
Cabinet p. 6; R9 S03 / S04 / S10.

02 SINK WALL / ALIGNED STONE SEAM

Window width 52 nominal; sill 44 and head 92 are retained study levels, subject to field template.


PANTRY AND FRIDGE ELEVATION

SOURCE COORDINATION / 22 OCT 2026

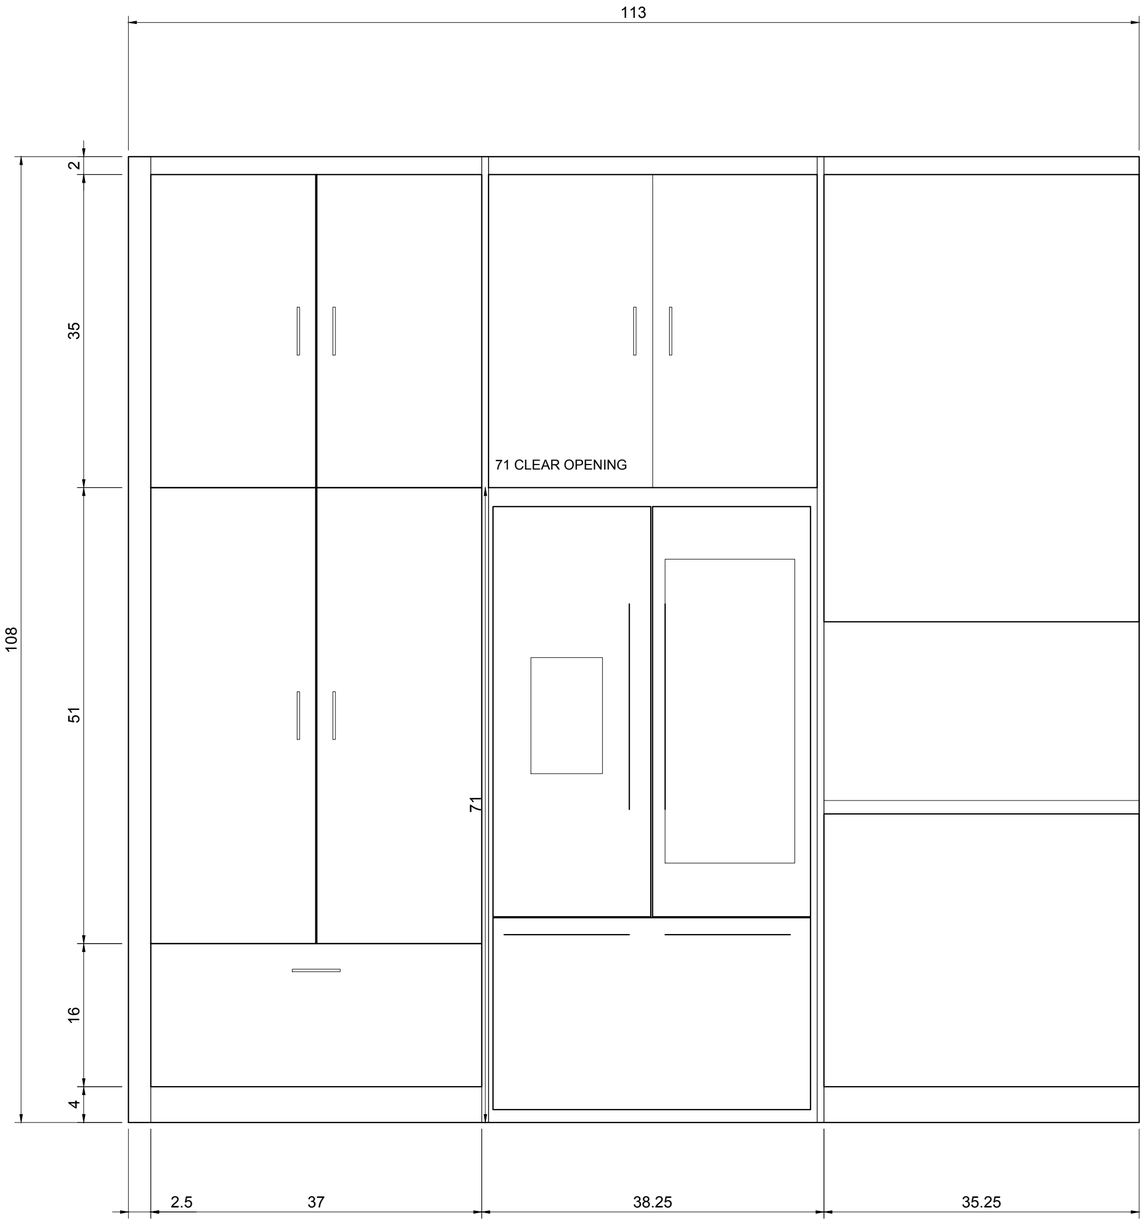

03 LEFT RUN / COFFEE PANTRY

Pantry external 37; pocket partitions provide 30.9 nominal clear width. Lowest tray only pulls out.

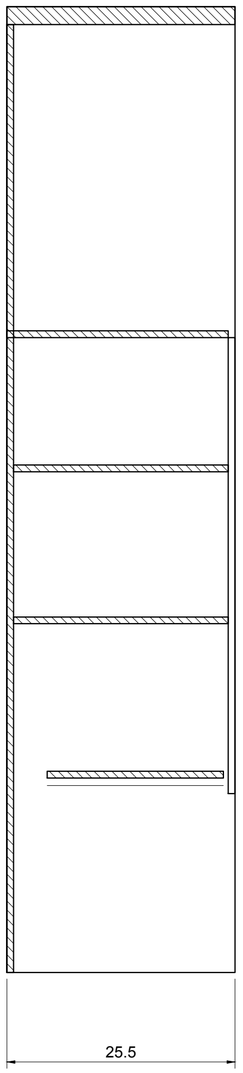

PANTRY SECTION

1 in. = 1 ft / fixed upper shelves

COFFEE PANTRY
Lower drawer 16 above 4 toe.
Pocket bay 51 high: 19 / 17 / 15.
Upper cabinet 35 + 2 top filler.
Upper two shelves fixed.
Lowest tray: proposed 500 mm runner.
Pocket doors shown closed.


FRIDGE CLEARANCE HOLD
Bay nominal 36.75 wide.
Opening 71 clear per owner red note.
Retained LG maximum height 70.25.
Only 0.75 nominal allowance above.
Ventilation / hinge / service clearance must be checked against actual model.

FINISH
25.5 finished pantry depth.
Adjacent garage wall face flush.
Pocket pull on left from room.
Slides toward cabinets; see A402.
Saba Beige name / code discrepancy: source 996B; named swatch 669B.
Physical finish/code confirmation needed.

SOURCE
Cabinet pp. 1 / 3 / 4; Owner coordination notes.


ISLAND CABINETRY AND STONE

SOURCE COORDINATION / 22 OCT 2026

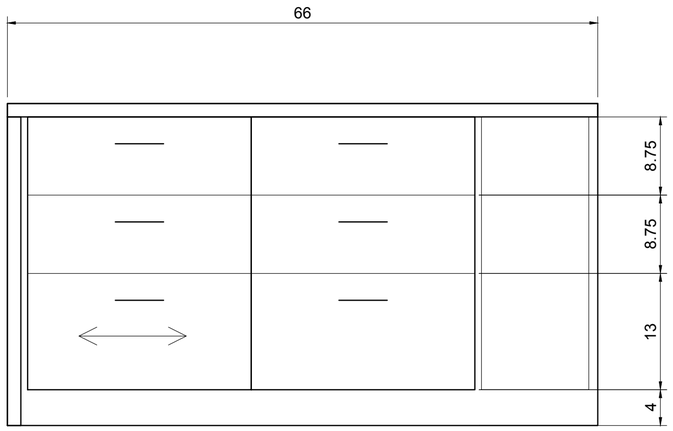

04 MAIN DRAWER FACE

Six fronts / horizontal grain / two concealed Type B trays

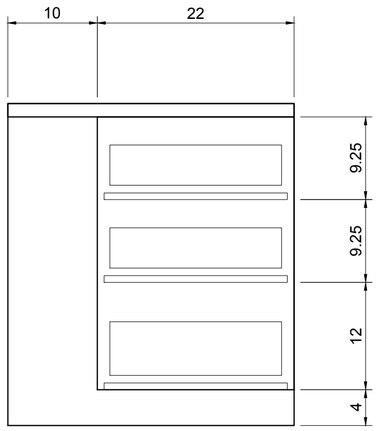

06 RANGE END / GLASS TRAYS

Three supported trays; 20.5 clear bay. No waterfall.


ISLAND DATUMS
Top 66 x 32; finished height 36.
22 body + 10 seating overhang.
1.5 finished edge / 12 mm porcelain.
Main bank 50 = 2 x 25.
Main rows 13 / 8.75 / 8.75.
Type B trays in both top drawers.
No internal dividers.

END TRAYS
Range-end datums:
4 / 16 / 25.25 / 34.5.
Glass heights: 6 / 4.5 / 4.5.
Outer end is the only waterfall.

FINISH / SUPPORT
I03: 31.75 x 34.5, range half.
I03 flush with adjacent laminate.
Main fronts horizontal grain.
End panel grain vertical.
Stone support, adhesive and runners are coordination intent, not ratings.


OUTLET HOLD
Upper-corner outlet unselected.
Confirm box, backing and tray travel before machining any cutout.

SOURCE
Cabinet pp. 7-9; R9 S06 / S09.

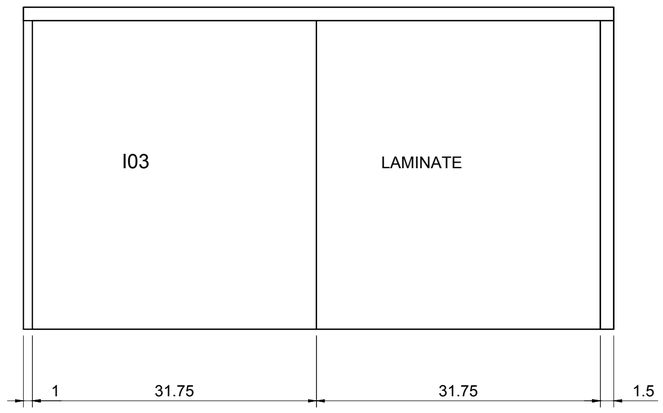

05 SEATING FACE

Range at left / single waterfall at living-room end

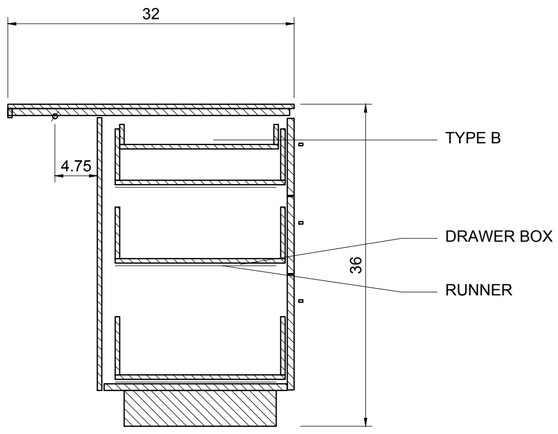


CUT THROUGH MAIN BANK / D = 100

07 TRANSVERSE SECTION

LED centre 4.75 from cabinet face below 10 overhang

PULLOUTS AND POCKET DOOR DETAILS


SOURCE COORDINATION / 22 OCT 2026

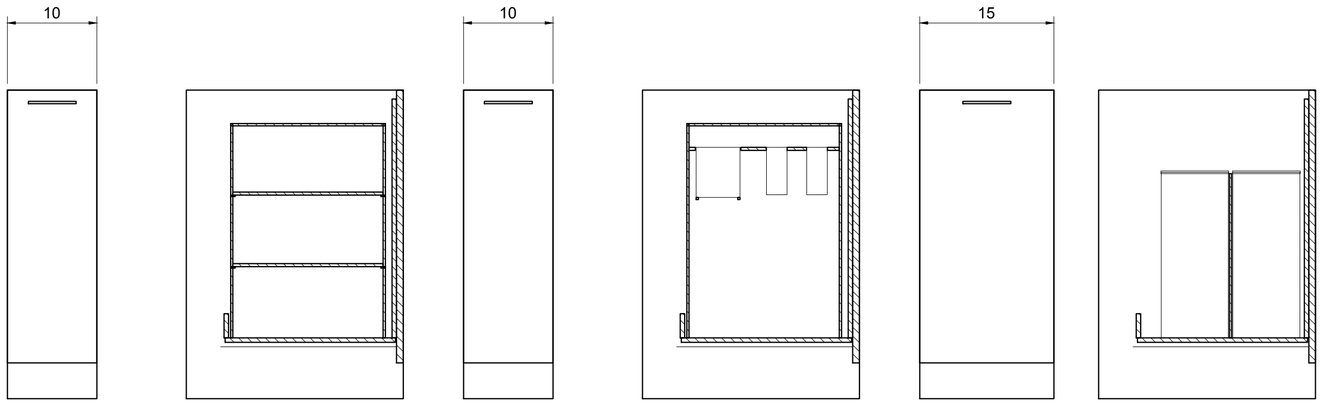


SPICE / LEFT OF RANGE — SECTION / STUDY
FULL-HEIGHT PULLOUT — Runners by supplier

UTENSIL / RIGHT OF RANGE — SECTION / STUDY
FULL-HEIGHT PULLOUT — Runners by supplier

GARBAGE + RECYCLING — SECTION / STUDY
FULL-HEIGHT PULLOUT — Runners by supplier

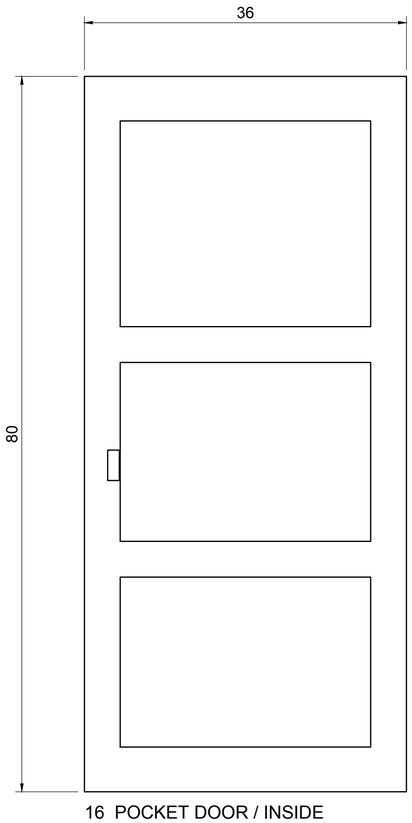

16 POCKET DOOR / INSIDE

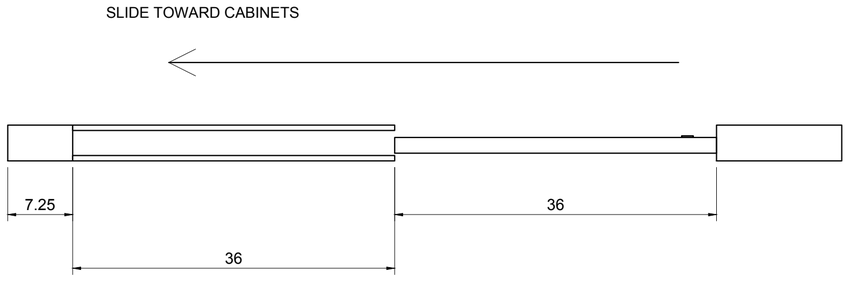

Pocket D120.25-156.25; opening D156.25-192.25.
7.25 from cabinet end D113 to pocket start.
Inside-left pull at D189; opening position retained.

22 OCTOBER COORDINATION
Range pullouts: 10 in. bays.
Spice left / utensils right facing range.
Full-height fronts with top horizontal pulls.
Waste bay remains 15 in. wide.
Two tandem bins + divider/support.


INTERIORS ARE SCHEMATIC
Proposed fit coordinated with 3D study.
500 mm runner / final rating pending.
Bins: 10.9 W x 7.5 D x 18.5 H study.
Final capacities and supplier pending.
No fixed shelf / door hinges in pullouts.
Closed-front elevations on A201 / A202.

POCKET DOOR
Handle left from inside kitchen.
Leaf slides right toward cabinet side.
36 x 80 opening position unchanged.
Pocket cavity between retained wall skins.
Kit, wall framing and services to verify.

SOURCE
Owner coordination notes 22 October.
Cabinet pp. 5 / 6; plan A101.


STONE JUNCTION DETAILS

SOURCE COORDINATION / 22 OCT 2026

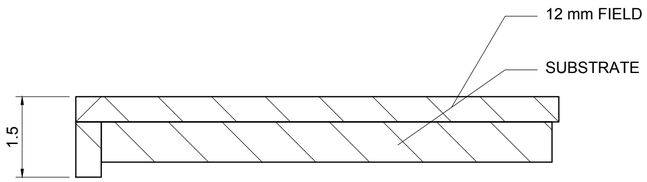

08 BUILT-UP EDGE

12 mm field; 1.5 finished edge.
Mitre / substrate / adhesive by fabricator.
Use adjacent same-slab edge band.

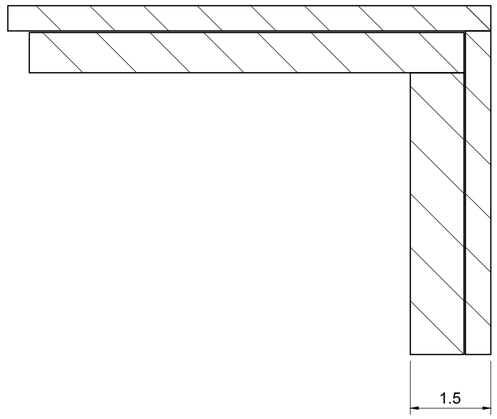

09 OUTER WATERFALL / J-W


One waterfall at living-room end.
1.5 finished return envelope.
I01 / I02 vein match across mitre.

STONE COORDINATION
12 mm Statuario porcelain.
All exposed edges finished.
Joint widths / fillers by supplier.
Stone faces bonded to coordinated backing.

CUTTING HOLDS
Field-template every visible end.
Confirm slab scan and vein registration.
C03 / B06 = 121.5 nominal.
123 slab leaves 1.5 gross only.
Kerf and trimming must be resolved.
Do not infer extra slab allowance.


SEAMS
J-C counter and J-B backsplash at 42.
Align vertically below window.
Check sink-flange clearance to seam.
J-90: proposed mitred wall corners.

SOURCE
R9 S04 / S07 / S08 / S09.
Details show intent, not fabrication.

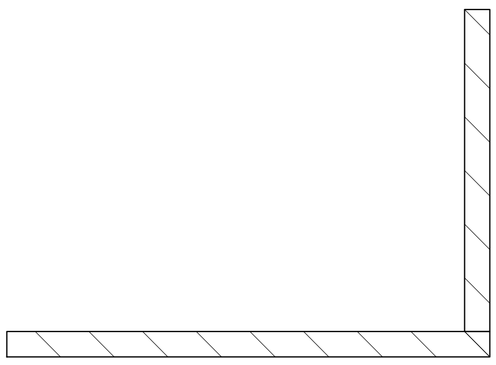

10 COUNTER / BACKSPLASH

12 mm Statuario at both fields.
Mitred inside corner is design intent.
Fabricator to confirm joint / movement.

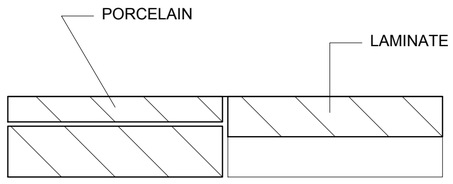


BOND LAYER / THICKNESS TO SUPPLIER

11 FLUSH I03 / LAMINATE

Set back backing for stone + adhesive.
Match finished face; keep joint clear.
Actual adhesive thickness unselected.

WINDOW STONE COORDINATION

SOURCE COORDINATION / 22 OCT 2026

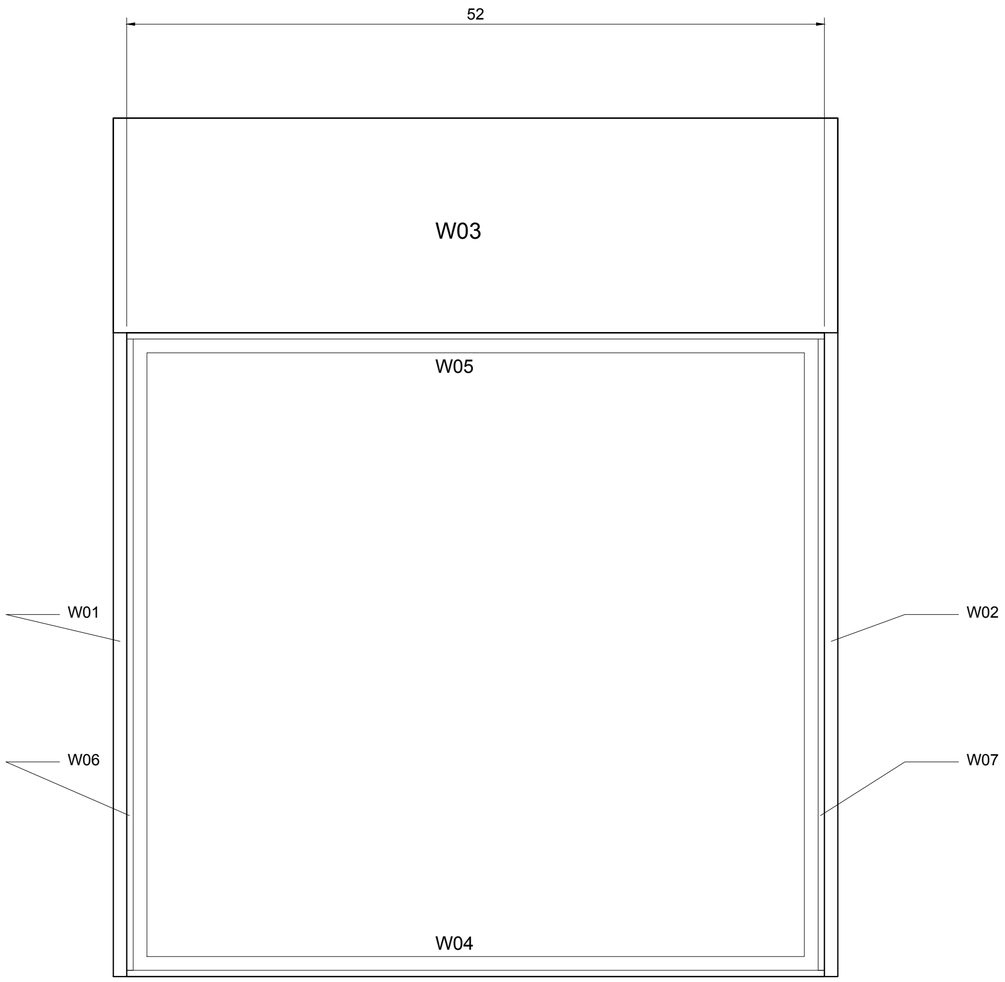

SEVEN PIECES / ONE COORDINATED OPENING
W01 Wall face left of opening
W02 Wall face right of opening
W03 Wall face above opening
W04 Sill / bottom reveal
W05 Head / top reveal
W06 Left internal jamb
W07 Right internal jamb

FIELD TEMPLATE REQUIRED
52 nominal width / 59.25 shared centreline.
Drawing flags 1/4 in. centreline discrepancy.
Study sill 44, head 92; not surveyed levels.
Opening height and depth require measurement.
Frame, sash and drainage must remain operable.
Blinds and internal applied trim removed.

MATERIAL
All seven pieces 12 mm Statuario porcelain.
Shop-coordinate mitres, face/reveal joints,
finish and matched vein direction.
Do not derive cut sizes from this study.


SOURCE
Owner coordination notes; Cabinet p. 6; R9 S03 / S10.

12 INTERIOR ELEVATION

52 nominal window / 49 study glass / height and reveals by field template


SELECTED HOOD AND RANGE STONE

SOURCE COORDINATION / 22 OCT 2026

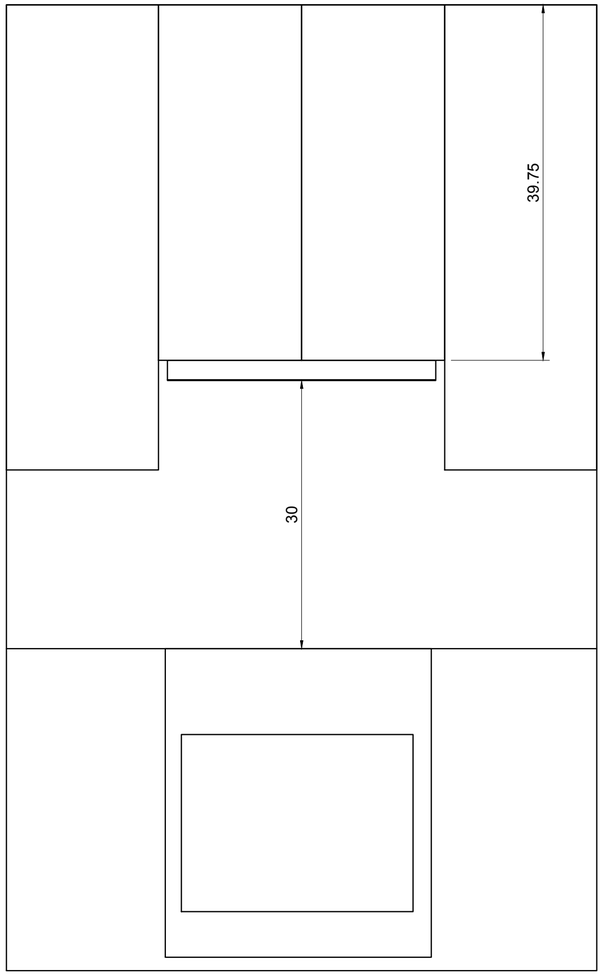

14 SELECTED B / 30 IN. LOWEST CLEARANCE

Owner selection 22 Oct; actual Sakura dimensions pending.
Stone bottom approx. 68-1/4; centre height approx. 39-3/4.

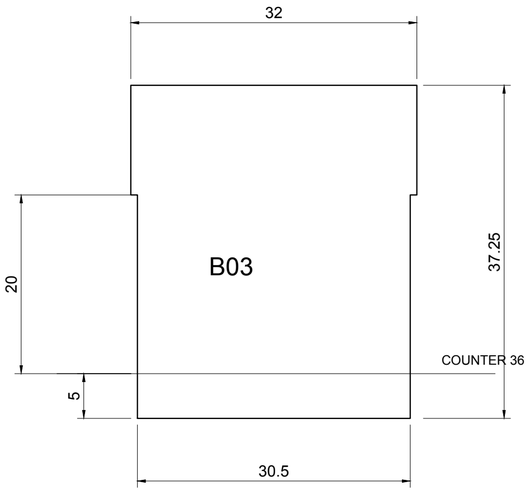

15 B03 / RANGE OMITTED

12 mm Statuario porcelain; stepped single piece.
5 below counter is from R9 S05 / S08.

SELECTED DESIGN
B selected by owner 22 October.
A is superseded in this issue.
Lowest modeled underside = 66.
Electric cooktop = 36; clearance = 30.

B03 IS NOT THE HOOD FRONT
R9: 30.5 lower / 32 upper width.
5 below counter: bottom 31.
Shoulder step at 56.
Top aligned to selected B stone datum.
Overall approx. 37-1/4 is derived;
not a field measurement or cut size.
Final top/template against actual Sakura.

HOOD / FABRICATION HOLDS
Actual Sakura underside and casing.
Manufacturer installation requirements.
Stone/substrate/adhesive system.
Return depth; hinges and rated loads.
Flue route, size and support.

SOURCE
Owner coordination notes 22 October.
Stone R9 S05 / S08; Cabinet p. 5.
Source 34 overall belongs to old level;
5 below-counter continuation retained.