STONE JUNCTION DETAILS

SOURCE COORDINATION / 22 OCT 2026

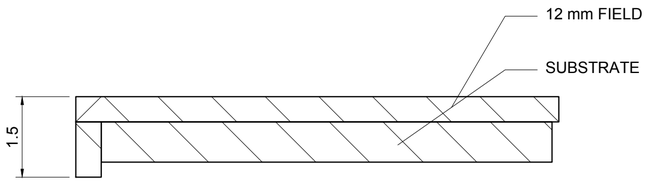

08 BUILT-UP EDGE

12 mm field; 1.5 finished edge.
Mitre / substrate / adhesive by fabricator.
Use adjacent same-slab edge band.

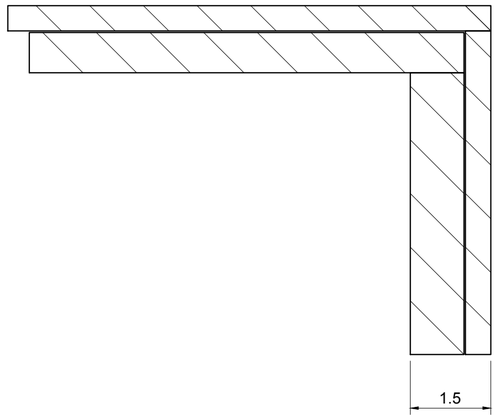

09 OUTER WATERFALL / J-W

One waterfall at living-room end.
1.5 finished return envelope.
I01 / I02 vein match across mitre.

STONE COORDINATION
12 mm Statuario porcelain.
All exposed edges finished.
Joint widths / fillers by supplier.
Stone faces bonded to coordinated backing.

CUTTING HOLDS
Field-template every visible end.
Confirm slab scan and vein registration.
C03 / B06 = 121.5 nominal.
123 slab leaves 1.5 gross only.
Kerf and trimming must be resolved.
Do not infer extra slab allowance.

SEAMS
J-C counter and J-B backsplash at 42.
Align vertically below window.
Check sink-flange clearance to seam.
J-90: proposed mitred wall corners.

SOURCE
R9 S04 / S07 / S08 / S09.
Details show intent, not fabrication.

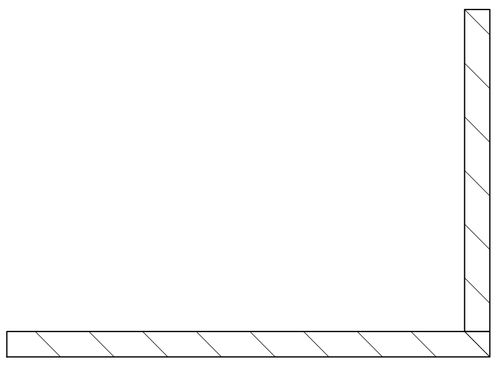

10 COUNTER / BACKSPLASH

12 mm Statuario at both fields.
Mitred inside corner is design intent.
Fabricator to confirm joint / movement.

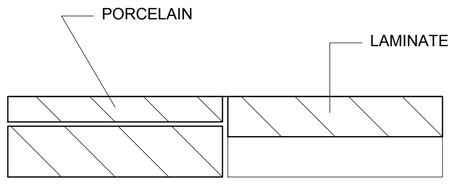

BOND LAYER / THICKNESS TO SUPPLIER

11 FLUSH I03 / LAMINATE

Set back backing for stone + adhesive.
Match finished face; keep joint clear.
Actual adhesive thickness unselected.

KITCHEN RENOVATION

DESIGN COORDINATION STUDY - FIELD VERIFY - NOT FOR CONSTRUCTION

Stone junction details

22 OCT 2026 | 6 in. = 1 ft | 24 x 18 in. | INCHES

A501