WINDOW STONE COORDINATION

SOURCE COORDINATION / 22 OCT 2026

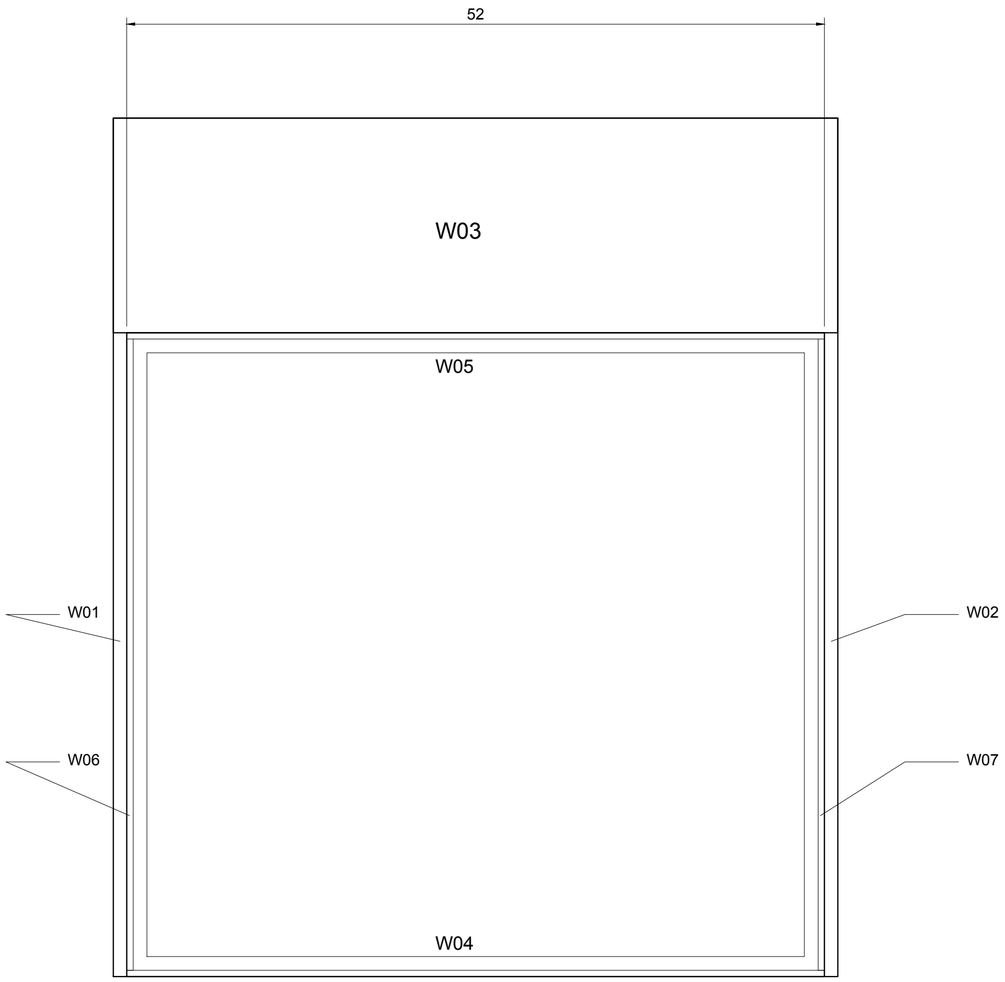

SEVEN PIECES / ONE COORDINATED OPENING
W01 Wall face left of opening
W02 Wall face right of opening
W03 Wall face above opening
W04 Sill / bottom reveal
W05 Head / top reveal
W06 Left internal jamb
W07 Right internal jamb

FIELD TEMPLATE REQUIRED
52 nominal width / 59.25 shared centreline.
Drawing flags 1/4 in. centreline discrepancy.
Study sill 44, head 92; not surveyed levels.
Opening height and depth require measurement.
Frame, sash and drainage must remain operable.
Blinds and internal applied trim removed.

MATERIAL
All seven pieces 12 mm Statuario porcelain.
Shop-coordinate mitres, face/reveal joints,
finish and matched vein direction.
Do not derive cut sizes from this study.

SOURCE
Owner coordination notes; Cabinet p. 6; R9 S03 / S10.

12 INTERIOR ELEVATION

52 nominal window / 49 study glass / height and reveals by field template